





Hobie Seat Peg Replacement Instructions

Depending on what year your seatback is, you may or may not need to replace the seat pegs to match the attachments on your hull. If the seat pegs look like the picture to the right, please disregard these replacement instructions and use them as you were instructed in your kayak owners manual. If you have a different design seat peg, follow the replacement instructions below.





Replacing the Seat Pegs



1. Remove the old seat plugs by unthreading the key ring and removing the brass part, or unscrewing the seat plugs from the seat. It depends on which generation seat that you have.

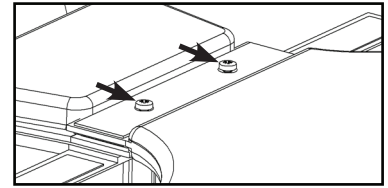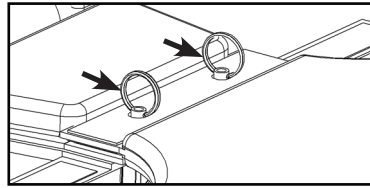

2. With the old seat plugs removed, press in the new seat pegs provided through the bottom of the seat into the holes on the seat webbing.

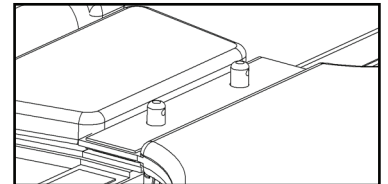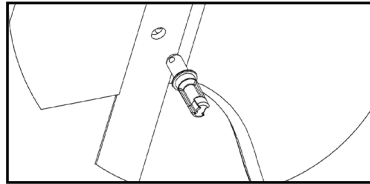


3. Place the handle over the seat peg and press the roll pin through the entire assembly. Using a pair of pliers helps get the pin started and full pressed in. Follow this same procedure with the other seat peg on the seat.

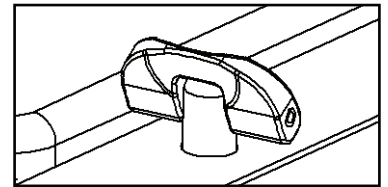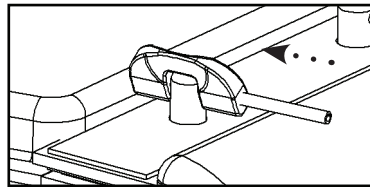


Attaching Your Seatplug to the Kayak


1. Line up the plugs underneath the velcro flap on the seat so that they are in line as shown here. Press them into the plugs in the seat area.

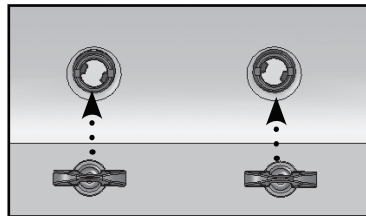

2. Press in and turn the seat pegs 90 degrees clockwise to lock them in place.

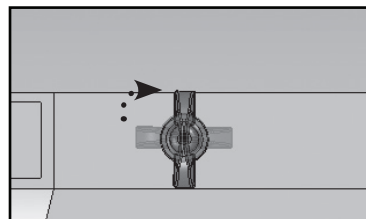

3. Fold down the plug handles and lay the velcro flap over the plug.

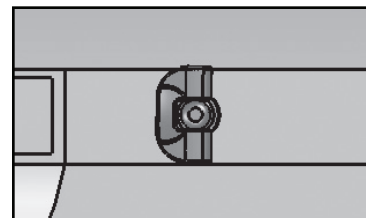

We recommend that the seatbacks be removed while car-topping your kayak.