

#84500111 H-BAR INSTALLATION INSTRUCTIONS


PAGE 1 OF 4

Product Overview

The H-Bar adds utility and options to your Hobie Mirage Pro Angler kayak. Designed with the stand-up angler in mind, the H-Bar not only provides standing stability, but a great support platform for entering and exiting your kayak. Use the H-Bar to pull your self up and make a cast to that feeding fish. Made from anodized aluminum, the H-Bar is light, strong, and quiet so fish don't spook. Mount accessories on the H-Bar like fishfinders or rod holders or leave it clear for a stand-up paddling. Add a stripping basket to the front for snag-free fly fishing. Cast further while you lean against the foam pad in comfort. Remove two pins and the H-Bar folds away in seconds, leaving your front hatch and cockpit area fully accessible.

Parts

- a. (4 qty.) Large Nuts
- b. (4 qty.) Large Bolts
- c. (8 qty.) Bolts
- d. (8 qty.) Washers
- e. (8 qty.) Nuts
- f. Attachment Bungee® with Hook
- g. (4 qty.) Mounting Brackets
- h. H-Bar & Standard Struts (not shown here)
- i. Short Struts

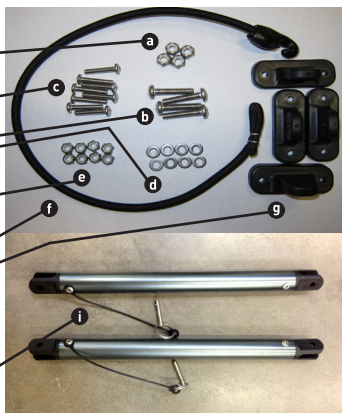

Installation Instructions

There is an H-Bar installation video available on our YouTube channel (<http://youtu.be/dpxsa5GDQTW>)

STEP: 1



Attach the mounting brackets to the H-Bar frame using the pins. The protrusions of the mounting brackets should be facing up and inwards. Lay the frame of the H-Bar with the mounting brackets attached on the mounting boards of the Pro Angler with the front of the frame clearing the front hatch. This will provide you with a good idea of how the H-Bar will lie when it is in the down position.

#84500111 H-BAR INSTALLATION INSTRUCTIONS


PAGE 2 OF 4

STEP: 2



With the H-Bar in the desired position, drill a pilot hole on the front mounting brackets and attach them with one bolt each to hold the H-Bar in place. The legs of the H-Bar can be flexed outward a little on each side to center the mounting brackets better on the mounting boards.

STEP: 3

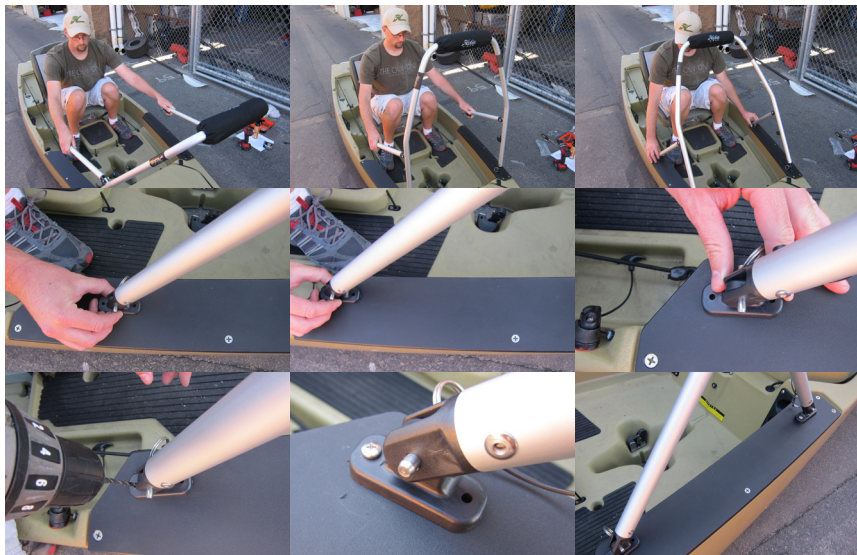

Fold the H-Bar into the up position and determine the correct height of the top of the H-Bar. Usually waist height is the most comfortable fit. Adjust it fore or aft depending on your height. Drill pilot holes for the rear mounting brackets when they are in the desired position. Again the legs of the H-Bar can be flexed outward to fit better.

#84500111 H-BAR INSTALLATION INSTRUCTIONS

PAGE 3 OF 4

STEP: 4



Now we know where the mounting brackets will need to be installed so we can finish the installation off. Use the remaining bolts, washers and nuts to install the mounting brackets.

STEP: 5



The H-Bar is connected to the front mounting brackets with friction pins. These pins are for quick removal of the bar. If the H-Bar will remain on your kayak, the front pins may be removed and replaced with the provided large bolts and nuts. This will provide a more solid install for long term use. Be careful to not over-tighten the bolts.

#84500111 H-BAR INSTALLATION INSTRUCTIONS

STEP: 6



For transport, put the H-Bar in the down position; loop the bungee through the front handle of your Pro Angler and through the H-Bar. Connect the hook to the loop to hold it in place.

