


## Installation:

1. The clevis pin holding the shroud in place in the shroud adjuster must be removed and replaced by the ball lock pin that is part of the shroud extender wire assembly.
2. Using the clevis pin removed in #1 above, pin one end of the shroud extender wire assembly to the shroud adjuster just below the attachment of the shroud to the shroud adjuster.
3. Attach the other end of the shroud extender wire assembly to the shroud per the drawing.

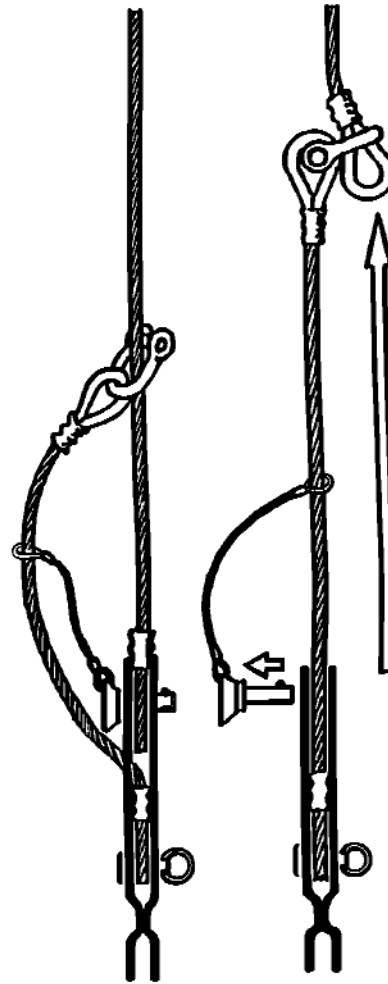

Use shackle provided in place of bracket shown.  
Place screw pin of shackle through the thimble of the extender wire  
w/ the body of the shackle around shroud and above it's bottom thimble.